

## Zerust<sup>®</sup> Axxatec<sup>™</sup> 8110C Additive


Zerust<sup>®</sup>/Excor<sup>®</sup> Axxatec<sup>™</sup> 8110 is an easy-to-use corrosion inhibiting aqueous-based additive for the protection of enclosed systems. Use to protect the water-filled void spaces of hydraulic and coolant equipment such as heat exchangers, industrial plate-chillers, and fire sprinkler systems for up to two years.

Zerust<sup>®</sup> Axxatec<sup>™</sup> 8110 protects interior surfaces and parts comprised of iron, steel, aluminum, copper and brass within closed systems. Axxatec 8110 is water-based and easily diluted in glycolic coolants or water-based fluids. Use Zerust Axxatec 8110 to prevent corrosion in closed systems for up to two years.

In addition, Axxatec 8110 will provide a few hours of corrosion protection when used as a coating or final rinse for parts that will be enclosed in Zerust/Excor VCI Packaging Film. Axxatec 8110 helps prevent flash rust in-between production processes, but is not recommended as a long-term or stand-alone external corrosion protection coating. Check with your Zerust/Excor representative for a corrosion management system most effective for your metal assets.

### Application Example

Fire extinguishing water systems can be protected by Axxatec 8110 during downtime.

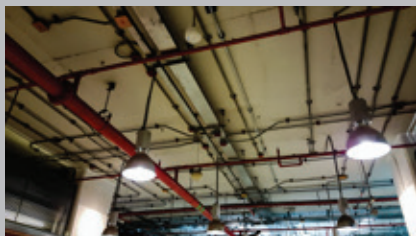

### Benefits

- Proven corrosion protection
- Protects multiple metal types
- Water-based concentrate
- Non-hazardous\*

### Application Type

- Storage
- Work in progress

\*Non-Hazardous Disposal: Product in unopened original container prior to use is non-hazardous waste in the United States according to 40 CFR 261 (no components listed on F, K, P or U lists; not ignitable, not corrosive, not reactive and not toxic).



## Specifications

<b>Product Information</b>	Zerust®/Excor® Axxatec™ 8110 is a water-based additive.	
<b>Properties</b>	Appearance	Light-yellow liquid
	Removability	Flush with deionized water
	pH	Approx. 6.8 - 7.8
<b>Protection Info</b>	Closed system	Up to 2 years
	Packaging/hermetically sealed	Up to 5 years
	Metal types	Ferrous, aluminum, copper and brass
<b>Storage</b>	Store in a cool (50 to 90°F / 10 to 32°C), dry place and away from sunlight in original packaging for up to 2 years from the date of shipment.	
<b>Disposal</b>	Dispose of in accordance with local, national and international regulations.	
<b>Dilution</b>	1 part Axxatec 8110 to 10 parts water. Pre-blend before adding to the system or may be added directly to the system.	

## Availability

Zerust® Axxatec™ 8110C is sold as a concentrate. Large volume quantities and pricing available upon request.

Part Number	Quantity
350-M-00005PL	5 Gal pail
350-M-00005DR	55 Gal drum

## Health and Safety

Non-Hazardous Disposal: Product in unopened original container prior to use is non-hazardous waste in the United States according to 40 CFR 261 (no components listed on F, K, P or U lists; not ignitable, not corrosive, not reactive and not toxic).

Warranty and Disclaimer Information: We guarantee our products conform to documented quality specifications. Product information subject to change without notice. We make no warranty of any kind expressed or implied as to the effects of use (including, but not limited to, damage or injury). For full warranty and disclaimer information visit, [www.zerust.com/warranty](http://www.zerust.com/warranty).

©2013-2017 Northern Technologies International Corporation (NTIC). All Rights Reserved. NTIC is the owner of the following trademarks: ActivPak®, Cor-Tab®, EXCOR®, Flange Saver®, ICT®, NIT®, Plastabs®, Z-CIS®, Zerion®, ZERUST®, The ZERUST People®, and the Color "Yellow". ABRIGO®, UNICO®, and VALENO® are registered trademarks of EXCOR GmbH, a Joint Venture Partner of NTIC.

## Contact Us



A product of:  
Northern Technologies  
International Corp  
4201 Woodland Road  
Circle Pines, MN 55014  
USA

Phone. +1 763.225.6600  
Fax. +1 763.225.6645  
[sales@zerust.com](mailto:sales@zerust.com)  
[www.zerust.com](http://www.zerust.com)