

Zerust[®] ICT[®] SDA Advanced VCI Film

Zerust[®]/Excor[®] ICT[®] SDA Advanced VCI Film is a premium corrosion inhibiting packaging product for use in extreme long-term storage and challenging conditions. When properly packed and sealed, it protects metals in contaminated acid gas and marine environments.

This premium film combines Zerust Volatile Corrosion Inhibitor (VCI) chemistry with a unique oxygen and gas blocking property. This patented technology is only available from Zerust and gives the film the ability to protect metals from the causes of corrosion for years beyond traditional packaging products. The combination of VCI and gas barrier work together to comprehensively protect against the elements that cause corrosion. The Advanced film packaging must be tightly closed and heat sealed for long-term protection applications.

Zerust/Excor SDA Advanced Film VCI bags are up to 10 times more effective at blocking gases that cause corrosion and reduce VCI effectiveness than traditional poly bags. This product is the latest in the legacy of Zerust packaging technology. Zerust is the inventor of poly VCI technology and Zerust VCI film has proven its performance and safety* with thousands of customers worldwide for over 40 years. Zerust/Excor offers onsite support and service in more than 70 countries via a network of 29 joint venture partnerships.

Application Example

Critical tools are packed and heat-sealed in Zerust/Excor SDA Advanced VCI Film Bags for overseas shipping to remote job sites.




Benefits

- Superior corrosion protection
- Exclusive patented technology
- Metals are ready for use and assembly directly out of the packaging
- Extreme long-term protection
- Provides safe* and effective Zerust VCI protection.
- Recyclable

Application Type

- Storage in contaminated environments
- Long-term mothball storage
- Shipping and overseas shipping
- Work in progress near acids/chlorides

*Safe for people. This product does not pose a health hazard to users due to its classification as an article according to EU REACH, UN GHS, US OSHA HazCom and CA WHMIS regulations.

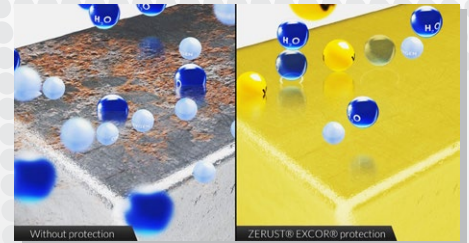

Product Information

| | |
|-------------------------------|---|
| Description | Zerust®/Excor® ICT® SDA Advanced VCI Film is a polyethylene product impregnated with volatile corrosion inhibitors. |
| Appearance | Typical colors are clear, yellow or green. Additional colors available upon request. Subject to order minimums. |
| Metal Protection Types | Available in ferrous, multimetal and non-ferrous protection formulations. |
| Protection Life | Protects clean metals for years when used correctly and utilized within three years from receipt. Not intended for outdoor use. |
| Storage | Store in original packaging away from direct sunlight in conditions below 85°F (30°C) and 50% RH for up to 3 years from the date of shipment. |

Availability

Zerust/Excor ICT540-SDA Advanced VCI Film is available in many custom additive options such as UV and Anti Static. Contact your account manager for pricing and availability.

Size Range (width):

Bags & Tubing:
 2" - 125" (flat)
 2" - 150" (gusset)
 Sheeting: 2" - 26'

| Property | Direction (Machine or Transverse) | Zerust ICT540-SDA Advanced Film* | Standard VCI Film | ASTM Test Method |
|--------------------------------|-----------------------------------|--|--|------------------|
| Film Thickness | - | 4 mil (100 µm) | 4 mil (100 µm) | D-6988 |
| Dart Impact Resistance | - | 340 g | 300 g | D-1709 |
| Tear Strength | MD | 320 gf (3.14 N) | 290 gf (2.85 N) | D-1938 |
| | TD | 460 gf (4.51 N) | 350 gf (3.40 N) | |
| Tensile Strength at Yield | MD | 2450 psi (16.9 MPa) | 1905 psi (13.1 MPa) | D-882 |
| | TD | 2380 psi (16.4 MPa) | 1538 psi (10.6 MPa) | |
| Tensile Strength at Break | MD | 2900 psi (20.1 MPa) | 3045 psi (21.0 MPa) | D-882 |
| | TD | 2550 psi (17.6 MPa) | 2917 psi (20.1 MPa) | |
| Elongation at Break | MD | 480% | 560% | D-882 |
| | TD | 430% | 610% | |
| Elmendorf Tear | MD | 540 gf | 220 gf | D-1922 |
| | TD | 270 gf | 290 gf | |
| Water Vapor Transmission Rate | - | 0.18 g/(100 in ² /day) @100°F (38°C), 100% RH | 0.24 g/(100 in ² /day) @100°F (38°C), 100% RH | F-1249 |
| Vapor Inhibiting Ability (VIA) | - | Pass | Pass | NACE TM0208 |

* Typical values, not meant to be a specification.

Warranty and Disclaimer Information: We guarantee our products conform to documented quality specifications. Product information subject to change without notice. We make no warranty of any kind expressed or implied as to the effects of use (including, but not limited to, damage or injury). For full warranty and disclaimer information visit, www.zerust.com/warranty.

©2013-2019 Northern Technologies International Corporation (NTIC). All Rights Reserved. NTIC is the owner of the following trademarks: ActivPak®, Cor Tab®, EXCOR®, Flange Saver®, ICT®, NTI®, Plastab®, Z-CIS®, Zerion®, ZERUST®, 洁乐特 and the Color "Yellow". ABRIGO®, UNICO®, and VALENO® are registered trademarks of EXCOR GmbH, a Joint Venture Partner of NTIC.

Contact Us

ZERUST® EXCOR®

A product of:
 Northern Technologies
 International Corp.
 4201 Woodland Road
 Circle Pines, MN 55014
 USA

Phone. +1 763.225.6600
 Fax. +1 763.225.6645
sales@zerust.com
www.zerust.com



Recyclable

Dispose of in accordance with local, national and international regulations. Check on options for recycling and incineration.

Safety

- Safe for people. This product does not pose a health hazard to users due to its classification as an article according to EU REACH, UN GHS, US OSHA HazCom and CA WHMIS regulations.
- Zerust VCI chemistry is safe for sensitive electronics. No galvanic effects, residues or changes in the properties of metals. The protective molecules dissipate upon opening of package.