

Zerust[®] AxxaWash[™] NW-10C

AxxaWash[™] NW10-C is a metalworking wash and rinse fluid that cleans and deactivates sources of corrosion such as chlorides, oils and contaminants. Cleaning with the wash solution enhances the effectiveness of future corrosion prevention methods.

Zerust[®]/Excor[®] AxxaWash NW-10C is a mildly alkaline, aqueous-based cleaning agent that can be used in immersion, ultrasonic, and low to ultra-high pressure (UHP) spray cleaning modes. In addition to effective hydrocarbon soil removal, a solution of AxxaWash NW-10C deactivates common corrosion causing anionic contaminants such as chlorides and sulfates left by metalworking fluids. Cleaning metals effectively results in prolonged periods of flash corrosion inhibition. The product is conveniently offered as a liquid concentrate and may be diluted per the application.

Ideal for use on highly reactive ferrous metals such as cast iron and freshly worked steel. Metals properly cleaned with a solution of AxxaWash NW-10 have enhanced corrosion protection from products such as Zerust Axxatec[™] and Axxanol[™] coatings and Zerust VCI packaging materials. Thoroughly dry the cleaned metals before placing into packaging. Check with your Zerust/Excor representative for a corrosion inhibitor system best for your metal assets.

Application Example

Prevent rust on parts caused by contaminants left over from metalworking fluids by washing with a solution of AxxaWash NW-10C. Apply as a final rinse for metals that are streak free.



Benefits

Water-based preservation cleaner concentrate

For use in ultrasonic, immersion, and low to ultra-high pressure spray modes

Streak-free and low odor

Deactivates common anionic contaminants


Removes soluble and particulate metalworking soils

Enhances the effectiveness of RP coatings and VCI packaging

Reduces flash corrosion

Complementary Products

Zerust VCI Packaging
Axxatec Water-Based RPs
Axxanol Oil-Based RPs
AxxaVis[™] Additives
AxxaClean[™] Cleaners

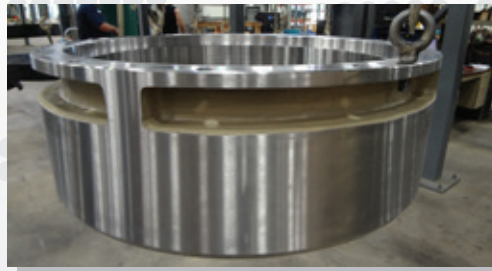

Cleaned item is dried thoroughly and put into Zerust®/Excor® Outdoor Preservation VCI Shrink Film.

Technical Data

Product Info	Metalworking rinse and wash fluid concentrate.	
Application	Apply via immersion, ultrasonic, spray, pressurized spray	
	Application temperature	77 - 140°F (25 - 60°C)
	Dilution Ratio	As required/See below
	Dwell time	As required
Properties	Appearance	Amber liquid
	pH of concentrate	11.5 - 12
	pH of 5% solution	9 - 10
	Max VOC of concentrate	26%
Metals Compatibility	Mainly for use on ferrous-based alloys and stainless steel. Test prior to use on non-ferrous alloys.	
Storage	Temp range	34° to 122°F (1° to 50°C)
	Duration	Up to 2 years
	Keep from freezing. If frozen, move to a location above 50° F (10° C) and allow to thaw. Mix well before use.	

Disposal Dispose of in accordance with local, national and international regulations.

Suggested Dosage Instructions

Application Method	Dosage Percent by Volume
Immersion	1-5%
Ultrasonic	1-5%
Spray - all pressures	1.5 - 2%

Note: The use concentration will be dependant on soil type, operating temperature and application method. Consult a Zerust/Excor representative if high UHP pressure spray cleaning methods are to be used. The operating guide for sump maintenance available on request.

Warranty and Disclaimer Information: We guarantee our products conform to documented quality specifications. All statement, technical information and recommendations contained herein are based on testing and experiences NTIC believes to be reliable, but the accuracy or completeness thereof is not guaranteed. Product information subject to change without notice. We make no warranty of any kind expressed or implied as to the effects of use (including, but not limited to, damage or injury). For full warranty and disclaimer information visit, www.zerust.com/warranty.

©2013-2017 Northern Technologies International Corporation (NTIC). All Rights Reserved. NTIC is the owner of the following trademarks: ActivPak®, Cor-Tab®, EXCOR®, Flange Saver®, ICT®, NTI®, Plastabs®, Z-CIS®, Zerion®, ZERUST®, The ZERUST People®, and the Color "Yellow". ABRIGO®, UNICO®, and VALENO® are registered trademarks of EXCOR GmbH, a Joint Venture Partner of NTIC.

Contact Us



A product of:
Northern Technologies
International Corp
4201 Woodland Road
Circle Pines, MN 55014
USA

Precautions

- Product foams when used in spray mode. Contact your Zerust/Excor representative for recommendations for suitable defoaming agents.
- If product becomes frozen in storage or shipping, allow to thaw and mix well. Reconstituted product should appear clear and amber yellow. If it is cloudy or has solids, contact your Zerust/Excor representative.

Contact a Zerust/Excor Corrosion Expert

Consult a Zerust representative to implement an optimum, cost-effective corrosion prevention system across your production facility and supply chain.

Availability

Zerust®/Excor® AxxaWash NW-10C is sold as a liquid concentrate. Large quantity pricing available upon request.

Part Number	Qty
350-W-00001PL	5 Gal
350-W-00001DR	55 Gal

Phone. +1 763.225.6600
Fax. +1 763.225.6645
sales@zerust.com
www.zerust.com